
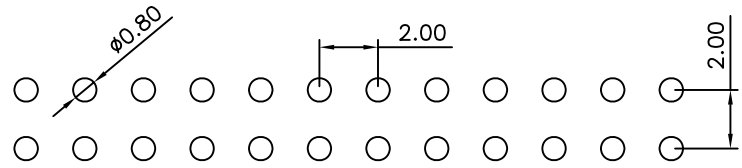
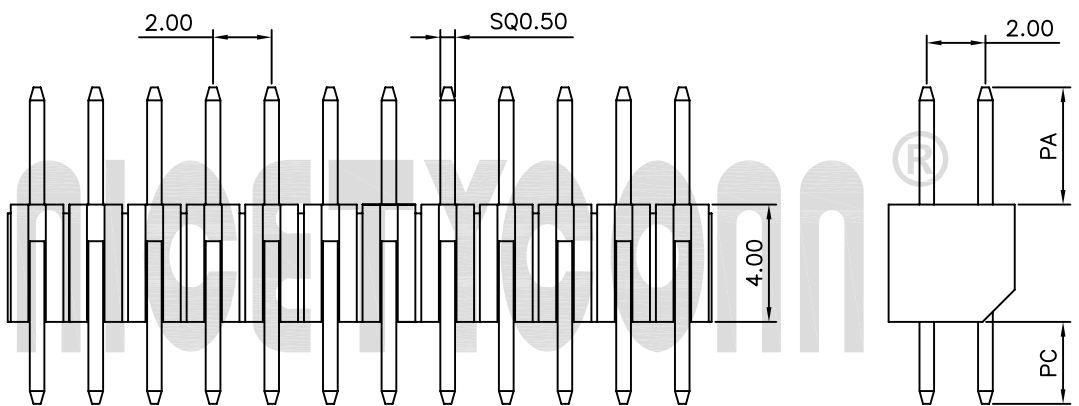


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-04-21

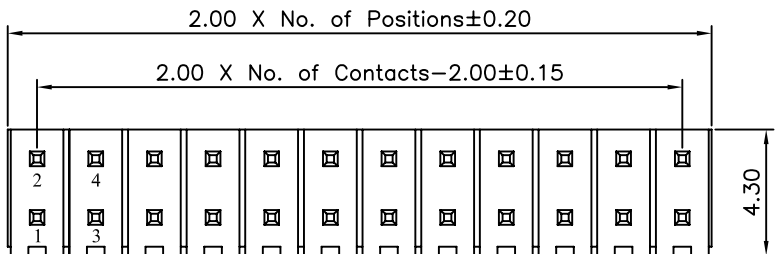

P.C.B LAYOUT

### Technical Data

Material:  
 Contact Material: Brass  
 Contact plating: Au or Sn Over 50μ" Ni  
 Insulator Material: Black Polyester UL94V-0  
 Standard: PBT/PA6T+30%G.F

Electrical:  
 Current rating: 2.0Amps/contact max.  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥1000MΩ at V=100V  
 Withstanding Voltage: 1000V AC/minute

Mechanical:  
 Mechanical life cycle: min.200  
 Operating temperature: -40°C to +105°C  
 Soldering temperature: +255°C

包装方式: 袋装

Dimension antitheses list (尺寸选型表)			
Item (项目)	L	PA	PC
Standard (尺寸)			
Remarks (备注)	以上尺寸可由客户选择		

PZ	2	40	12	XXX	D	XX	X	N	N	XXX
品名 PZ=排针	间距 2=2.00	塑高 40=4.00mm	产品类型 12=单塑双排	PIN位总数 04-80P	产品折弯类型 D=直插	表面处理 SN=1in120u" W=镀锡 G1=Gold 1u" G2=Gold 2u" G3=Gold 3u" G4=Gold 5u" G5=Gold 8u" G6=Gold 10u" G7=Gold 15u" G8=Gold 30u" GA=Gold 1.5u" S0=半金锡	塑胶材质 A=PBT B=PA46 C=PA6T D=PA66 E=PA9T F=LCP	塑胶特性 N=常规	排针盖 N=无	针长 针长=PA+PC+H

**nicetycomm® 深圳市创辉诚科技有限公司**  
 SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE:	2011-04-21	双排单塑180度排针 PH2.00 H=4.0 系列
X.XXX ±0.10	DRAWN:		图PZ24012XXXDXNNXXX
X.XX ±0.20	CHECKED:		PART NO: PZ24012XXXDXNNXXX
X.X ±0.30	APPROVED:		DRAWING NO: PZ24012DXXX028
X. ±0.50			REV: A0 UNIT: mm SCALE: 4:1 SIZE: A4