

4

3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-04-21

Technical Data

Material:

Contact Material: Brass

Contact plating: Au or Sn Over 50 μ " Ni

Insulator Material: Black Polyester UL94V-0

Standard: PBT/PA6T+30%G.F

Electrical:

Current rating: 2.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega$ /contactInsulation resistance: $\geq 1000\text{M}\Omega$ at V=100V

Withstanding Voltage: 1000V AC/minute

Mechanical:

Mechanical life cycle: min.200

Operating temperature: -40 $^{\circ}\text{C}$ to +105 $^{\circ}\text{C}$ Soldering temperature: +255 $^{\circ}\text{C}$

包装方式: 袋装

Dimension antitheses list (尺寸选型表)

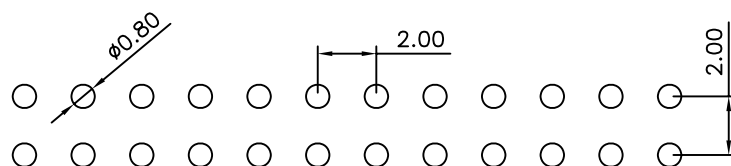
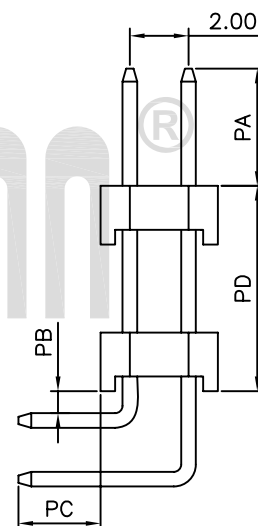
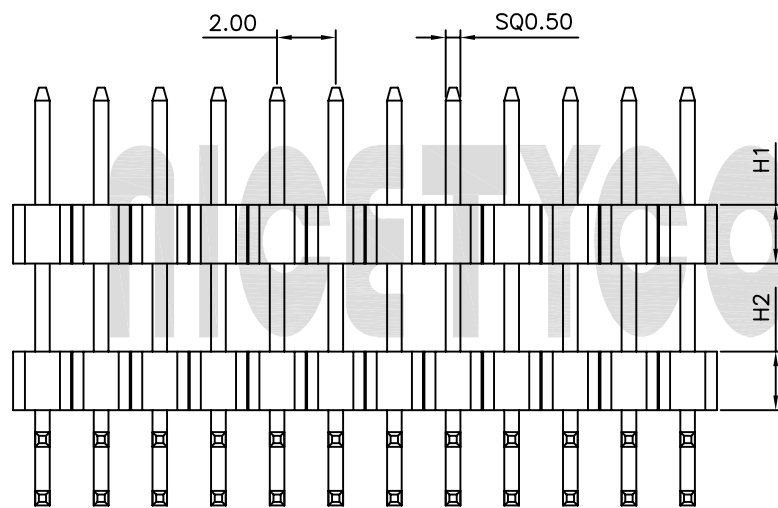
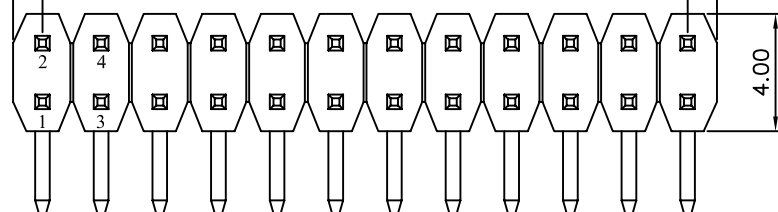
Item (项目)	L短针	L长针	PC	PA	PB	H1	H2
Standard (尺寸)							
Remarks (备注)	以上尺寸可由客户选择						

P.C.B LAYOUT

PZ	2	XX	22	XXX	R	XX	X	N	N	XXX
品名 PZ=排针	间距 2=2.00	塑高 10=1.00mm 15=1.50mm 20=2.00mm	产品类型 22=双塑双排	PIN位总数 04-80P	产品折弯类型 R=90度折弯	表面处理 SN=1120u" W=镀锡 G1=Gold Flash G2=Gold 1u" G3=Gold 2u" G4=Gold 3u" G5=Gold 5u" G6=Gold 8u" G7=Gold 10u" G8=Gold 15u" G9=Gold 30u" GA=Gold 1.5u" S0=半金锡	塑胶材质 A=PBT B=PA46 C=PA6T D=PA66 E=PA9T F=LCP	塑胶特性 N=常规	排针盖 N=无	针长 短针=1.0+PC+ D+PD+PA 长针=短针+4.0

nicetycomm 深圳市创辉诚科技有限公司
SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE $\pm 5^{\circ}$	DATE: 2011-04-21	双排双塑90度折弯排针 PH2.00 系列图
X.XXX ± 0.10	DRAWN:	PART NO: PZ2XX22XXXRXXXNXXX
X.XX ± 0.20	CHECKED:	DRAWING NO: PZ2XX22RXXX037
X.X ± 0.30	APPROVED:	REV: A0 UNIT: mm SCALE: 4:1 SIZE: A4
X. ± 0.50		

2.00 X No. of Positions ± 0.20 2.00 X No. of Contacts -2.00 ± 0.15 

4

3

2

1