

4




3

2

1

## REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2013-10-09

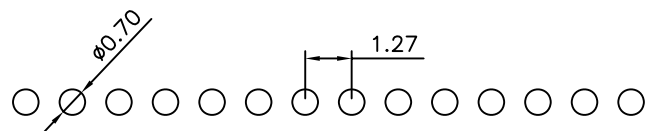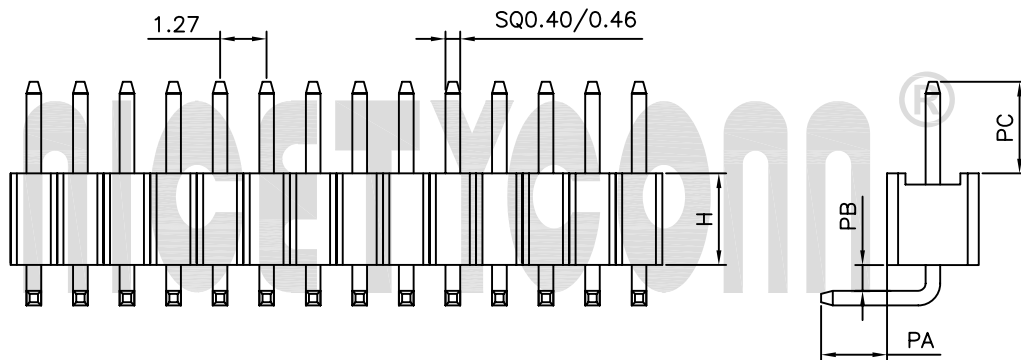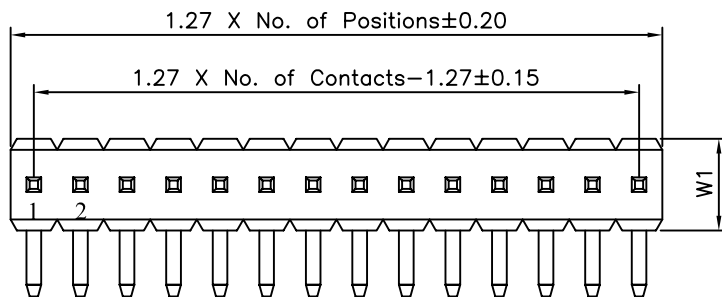

P.C.B LAYOUT

## Technical Data

## Material:

Contact Material: Brass

Contact plating: Au or Sn Over 50μ" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PA6T/PA9T/LCP+30%G.F

## Electrical:

Current rating: 1.0Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥500MΩ at V=100V

Withstanding Voltage: 500V AC/minute

## Mechanical:

Mechanical life cycle: min.200

Operating temperature: -40°C to +105°C

Soldering temperature: +255°C

包装方式: 袋装

Dimension antitheses list (尺寸选型表)

Item (项目)	L	PC	PA	PB	H	W1
Standard (尺寸)						
Remarks (备注)	以上尺寸可由客户选择					

PZ	3	XX	11	XXX	R	XX	X	N	N	XXX
品名 PZ=排针	间距 3=1.27	塑胶 10=1.0mm 15=1.5mm 16=1.6mm 17=1.7mm 20=2.0mm 25=2.5mm	产品类型 11=单塑单排	PIN位总数 01-50P	产品折弯类型 R=90度折弯	表面处理 SN=11n120u" MI=镀雾锡 GF=Gold Flash G1=Gold 1u" G2=Gold 2u" G3=Gold 3u" G4=Gold 5u" G5=Gold 8u" G6=Gold 10u" G7=Gold 15u" G8=Gold 30u" GA=Gold 1.5u" S0=半金锡	塑胶材质 C=PA6T E=PA9T F=LCP	塑胶特性 N=常规	排针盖 N=无	针长 针长=W1/2+PC+PB +H+PA

**nicetycomm** 深圳市创辉诚科技有限公司  
SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE ±5°	DATE: 2013-10-09	单排单塑90度折弯排针 PH1.27 系列图 塑胶反向
X.XXX ±0.10	DRAWN:	PART NO: PZ3XX11XXXXXXXNXXX
X.XX ±0.20	CHECKED:	DRAWING NO: PZ3XX11RXXX041
X.X ±0.30	APPROVED:	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50		

4

3

2

1