

4




3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-04-21

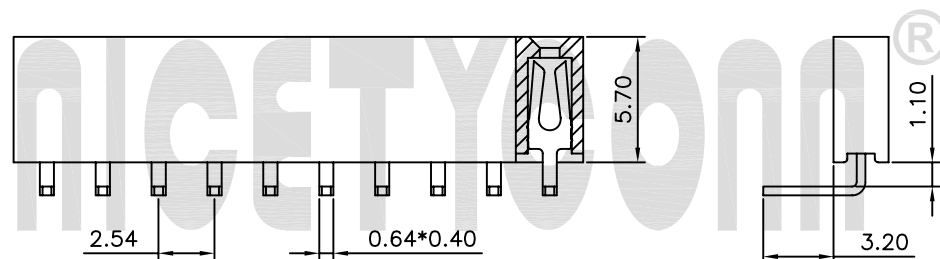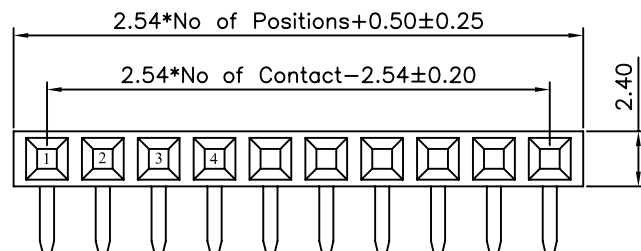

P.C.B LAYOUT

Technical Data

Material:

Contact Material: Brass

Contact plating: Au or Sn Over 50 μ " Ni

Insulator Material: Black Polyester UL94V-0

Standard: PBT/PA6T+30%G.F

Electrical:

Current rating: 3.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega$ /contactInsulation resistance: $\geq 1000\text{M}\Omega$ at V=100V

Withstanding Voltage: 1000V AC/minute

Mechanical:

Mechanical life cycle: min.200

Operating temperature: -40°C to +105°C

Soldering temperature: +255°C

PM	1	57	11	XXX	R	XX	X	N	Y	032
----	---	----	----	-----	---	----	---	---	---	-----

品名 PM=排母	间距 1=2.54	塑高 57=5.7mm	产品类型 11=单塑单排	PIN位总数 02~40P	产品折弯类型 R=90度直插	表面处理 SN Tin100u" GF Gold Flash G1 Gold 1u" G2 Gold 2u" G3 Gold 3u" G4 Gold 5u" G5 Gold 8u" G6 Gold 10u" G7 Gold 15u" G8 Gold 30u"	塑胶材质 A=PBT C=PA6T	塑胶特性 N=常规	塑胶类型 Y=Y型	端子PC/脚宽
-------------	--------------	----------------	-----------------	------------------	-------------------	---	-------------------------	--------------	--------------	---------

nicetycomm® 深圳市创辉诚科技有限公司
SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE $\pm 5^\circ$	DATE : 2011-04-21	单排折弯母座 PH2.54 塑高5.7 Y型
X.XXX ± 0.10	DRAWN :	PART NO: PM15711XXXRXXNY032
X.XX ± 0.20	CHECKED :	DRAWING NO: PM15711RY011
X.X ± 0.30	APPROVED :	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ± 0.50		

4

3

2

1