

4


3

2



1

## REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-06-21

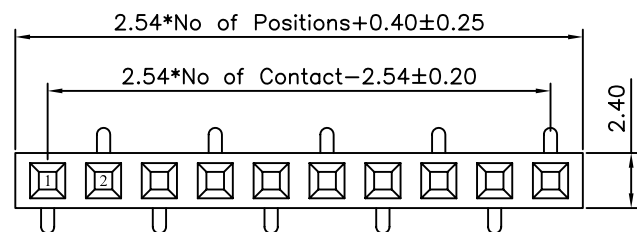

SMT A Type

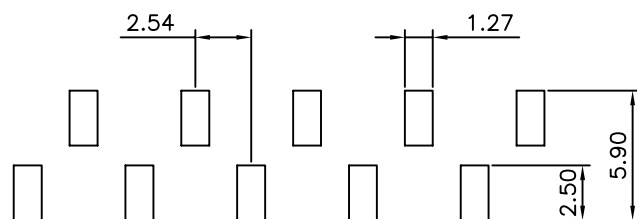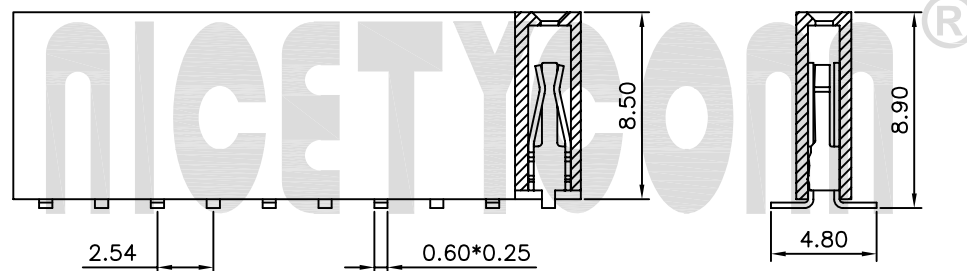

P.C.B LAYOUT

## Technical Data

## Material:

Contact Material:Phosphor Bronze

Contact plating: Au or Sn Over 50μ" Ni

Insulator Material:Black Polyester UL94V-0

Standard:PA6T+30%G.F

## Electrical:

Current rating:3.0Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage:1000V AC/minute

## Mechanical:

Mechanical life cycle:min.200

Operating temperature: -40°C to +105°C

Soldering temperature: +255°C

PM 1 85 11 XXX A XX X N U 048

品名 PM=排母	间距 1=2.54	塑高 85=8.5mm	产品类型 11=单塑单排	PIN位总数 02~40P	产品折弯类型 A=SMT第一P朝下	表面处理 SN Tin100u" GF Gold Flash G1 Gold 1u" G2 Gold 2u" G3 Gold 3u" G4 Gold 5u" G5 Gold 8u" G6 Gold 10u" G7 Gold 15u" G8 Gold 30u"	塑胶材质 A=PBT C=PA6T	塑胶特性 N=常规	塑胶类型 U=U型	端子PC/脚宽
-------------	--------------	----------------	-----------------	------------------	----------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------	--------------	--------------	---------

**nicetycomm®** 深圳市创辉诚科技有限公司  
SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE ±5°	DATE : 2011-06-21	单排贴片排母 A Type PH2.54 塑高8.5 U型
X.XXX ±0.10	DRAWN :	PART NO: PM18511XXXAXXNU048
X.XX ±0.20	CHECKED :	DRAWING NO: PM18511AU035
X.X ±0.30	APPROVED :	REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50		

4

3

2

1