
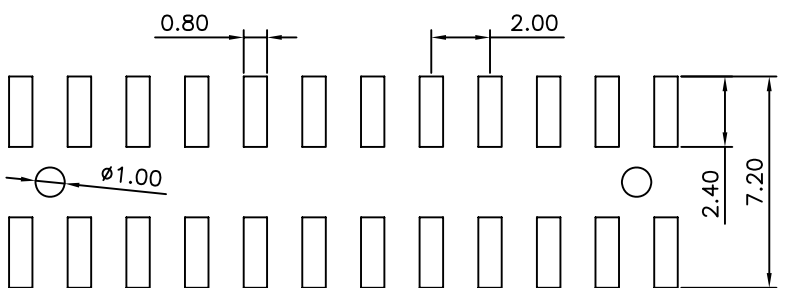
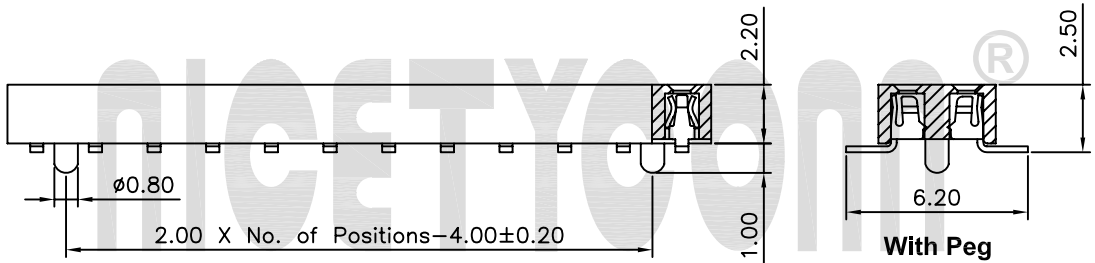


REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2011-04-21

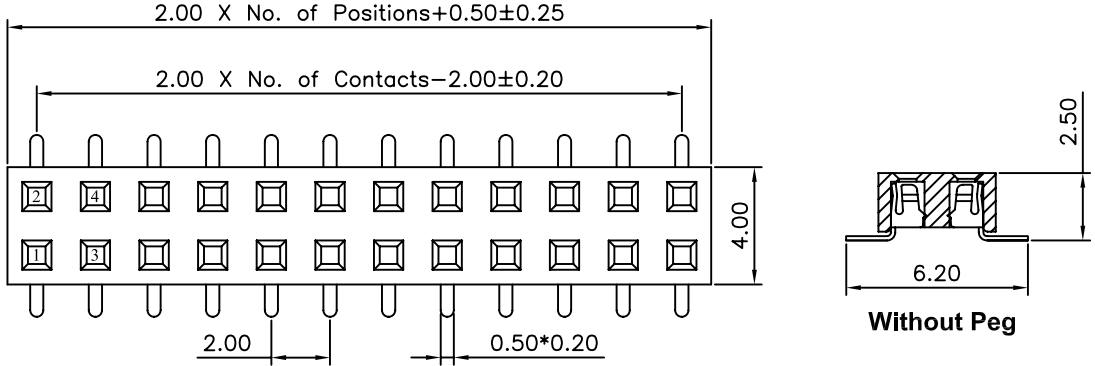

P.C.B LAYOUT

PM	2	22	12	XXX	S	XX	C	X	U	062
品名 PM=排母	间距 2=2.0mm	塑高 22=2.2mm	产品类型 12=单塑双排	PIN位总数 04~80P	产品折弯类型 S=SMT	表面处理 SN Tin100u" GF Gold Flash G1 Gold 1u" G2 Gold 2u" G3 Gold 3u" G4 Gold 5u" G5 Gold 8u" G6 Gold 10u" G7 Gold 15u" G8 Gold 30u"	塑胶材质 C=PA6T	塑胶特性 N=常规 W=带内柱	塑胶类型 U=U型	端子PC/脚宽

### Technical Data

**Material:**  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over 50μ" Ni  
 Insulator Material: Black Polyester UL94V-0  
 Standard: PA6T+30%G.F

**Electrical:**  
 Current rating: 2.0Amps/contact max.  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥1000MΩ at V=100V  
 Withstanding Voltage: 500V AC/minute

**Mechanical:**  
 Mechanical life cycle: min.200  
 Operating temperature: -40°C to +105°C  
 Soldering temperature: +255°C

**nicetycomm®** 深圳市创辉诚科技有限公司  
 SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2011-04-21	双排SMT排母PH2.0 H2.2 U型 PW6.2
X.XXX ±0.10	DRAWN :		PART NO: PM22212XXXSXXCXU062
X.XX ±0.20	CHECKED :		DRAWING NO: PM22212SU052
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50			