

4

3

2

1

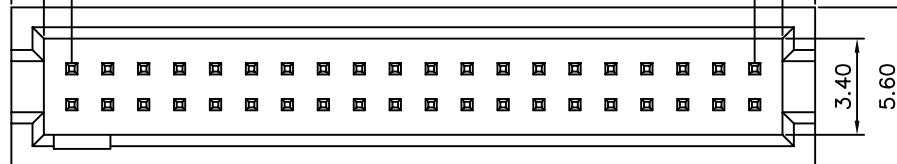
REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2013-05-14

$$1.27 \times \text{No.of Positions} + 3.0 \pm 0.30$$

$$1.27 \times \text{No.of Positions} + 0.7 \pm 0.25$$

$$1.27 \times \text{No.of Contacts} - 1.27 \pm 0.20$$



Technical Data

Material:

Contact Material: Brass

Contact plating: Au or Sn Over $50\mu\text{m}$ Ni

Insulator Material: Black Polyester UL94V-0

Standard: PA6T+30%G.F

Electrical:

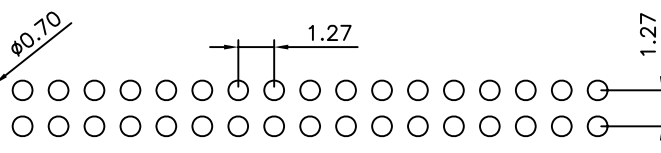

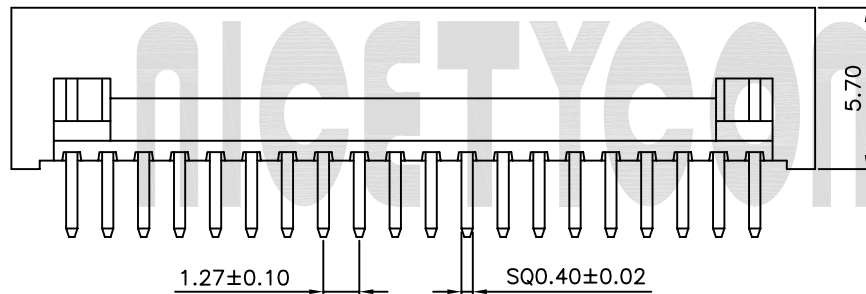
Current rating: 2.0Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega$ /contactInsulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Withstanding Voltage: 1000V AC/minute

Mechanical:

Mechanical life cycle: min.200

Operating temperature: -40°C to $+105^\circ\text{C}$ Soldering temperature: $+255^\circ\text{C}$ 

P.C.B LAYOUT

Dimension antitheses list (尺寸选型表)

Item (项目)	L	PC
Standard (尺寸)		
Remarks (备注)	以上尺寸可由客户选择	

JN

3

XX

D

XX

C

N

XXX

品名
JN=筒牛间距
3=1.27PIN位总数
06~50P产品折弯类型
D=直插

表面处理
SN=Tin120u"
MT=镀雾锡
GF=Gold Flash
G1=Gold 1u"
G2=Gold 2u"
G3=Gold 3u"
G4=Gold 5u"
G5=Gold 8u"
G6=Gold 10u"
G7=Gold 15u"
G8=Gold 30u"
GA=Gold 1.5u"
S0=半金锡

塑胶材质
C=PA6T塑胶特性
N=常规

针长

NICETYCOM®

深圳市创辉诚科技有限公司

SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON		TITLE:
ANGLE $\pm 5^\circ$	DATE :	2013-05-14	双排180度筒牛 PH1.27 H5.7 系列图
X.XXX ± 0.10	DRAWN :		PART NO: JN3XXDXXCNXXX
X.XX ± 0.20	CHECKED :		DRAWING NO: JN3DXXX007
X.X ± 0.30	APPROVED :		REV: A0
X. ± 0.50			UNIT: mm
			SCALE: 4:1
			SIZE: A4

4

3

2

1