
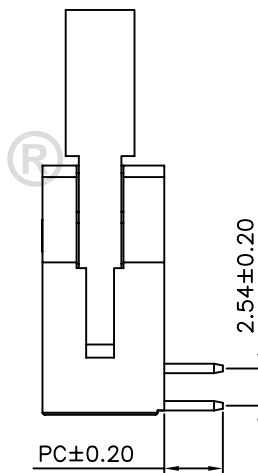
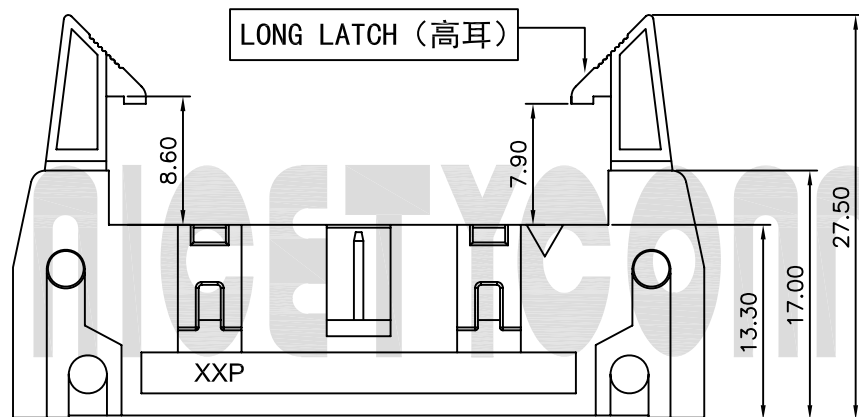


4


3

2

1

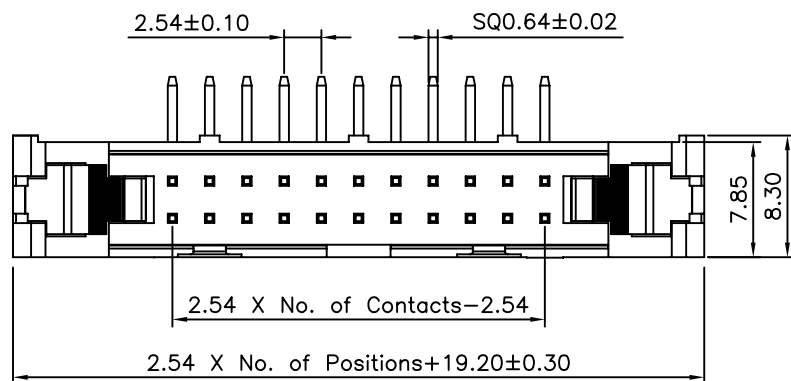

SHORT LATCH (低耳)

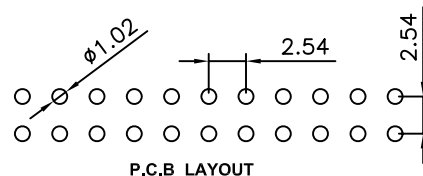

P.C.B LAYOUT

## REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2014-09-19

## Technical Data

Material:

Contact Material: Brass

Contact plating: Au or Sn Over 50μ" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PBT+30%G.F

Electrical:

Current rating: 3.0Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage: 1000V AC/minute

Mechanical:

Mechanical life cycle: min.200

Operating temperature: -40°C to +105°C

Soldering temperature: +255°C

## Dimension antitheses list (尺寸选型表)

Item (项目)	L	PC
Standard (尺寸)		
Remarks (备注)	以上尺寸可由客户选择	

NJ	1	XX	R	XX	X	X	XXX
品名 NJ=牛角	间距 1=2.54	PIN位总数 06~64P	产品折弯类型 R=90度折弯	表面处理 SN=Tin120u" MT=镀锡 GF=Gold Flash G1=Gold 1u" G2=Gold 2u" G3=Gold 3u" G4=Gold 5u" G5=Gold 8u" G6=Gold 10u" G7=Gold 15u" G8=Gold 30u" GA=Gold1.5u" S0=半金锡	塑胶材质 A=PBT C=PA6T F=LCP	塑胶特性 G=高耳 D=低耳	PC/脚宽

**nicetycomm®** 深圳市创辉诚科技有限公司  
SHENZHEN CHUANGHUICHENG TECHNOLOGY CO.,LTD

TOLERANCE	PROJECTON	TITLE:
ANGLE ±5°	DATE : 2014-09-19	双排90度牛角插座 PH2.54 系列图
X.XXX ±0.10	DRAWN :	PART NO: NJ1XXRXXXXXXX
X.XX ±0.20	CHECKED :	DRAWING NO: NJ1RXXX001
X.X ±0.30	APPROVED :	REV: A0
X. ±0.50		UNIT: mm
		SCALE: 2:1
		SIZE: A4

4

3

2

1